

## Ratchet levers with internal thread

### Item description/product images



### Description

#### Material:

Housing carbon steel, tension nut and tension pin case-hardened steel.

#### Version:

Black oxidised.

Matt-finished or high-polish chrome-plated versions available at extra charge.

#### Note:

Tension Pin A standard version (for ratchet action):

Use for clamping and releasing in limited space and when considerable travel is involved. In order to change the tightening direction, the handle must be reversed by 180°.

Tension Pin B special version:

Use for clamping and releasing in limited space and when short travel is involved.

The handle is not reversed in order to change the tightening direction. It must be pulled out before it can be engaged in the next slot.

Clamp with H7 reamed hole and DIN 6885/1 keyway.


#### On request:

Other thread, reamed hole and square socket sizes.

Dimension "A" available in other lengths at extra charge.

Special version: Tension pin B.

### Drawings

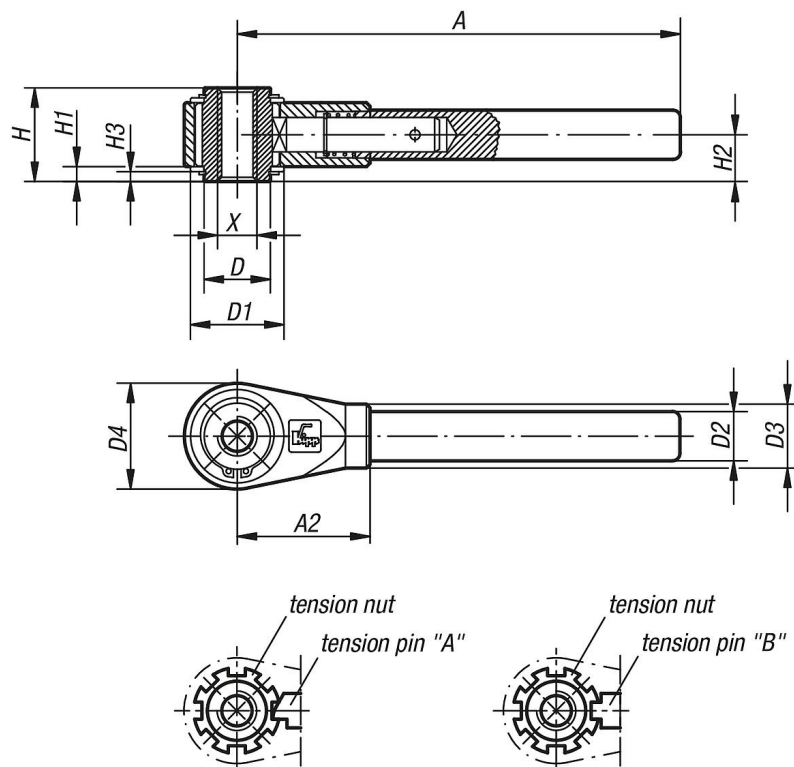

## Ratchet levers with internal thread

### Overview of items

#### Ratchet levers with female thread

| Order No. | Kind of fastening | Size | X   | A=Handle length | A2  | D  | D1 | D2 | D3 | D4 | H  | H1  | H2   | H3 | No. of index slots |
|-----------|-------------------|------|-----|-----------------|-----|----|----|----|----|----|----|-----|------|----|--------------------|
| K0128.310 | internal thread   | 1    | M10 | 150             | 48  | 22 | 33 | 17 | 22 | 36 | 31 | 4,5 | 15,5 | 3  | 7                  |
| K0128.312 | internal thread   | 1    | M12 | 150             | 48  | 22 | 33 | 17 | 22 | 36 | 31 | 4,5 | 15,5 | 3  | 7                  |
| K0128.314 | internal thread   | 2    | M14 | 180             | 54  | 27 | 38 | 20 | 26 | 43 | 38 | 6   | 19   | 4  | 8                  |
| K0128.316 | internal thread   | 2    | M16 | 180             | 54  | 27 | 38 | 20 | 26 | 43 | 38 | 6   | 19   | 4  | 8                  |
| K0128.318 | internal thread   | 3    | M18 | 230             | 70  | 35 | 45 | 24 | 30 | 51 | 42 | 6   | 21   | 4  | 8                  |
| K0128.320 | internal thread   | 3    | M20 | 230             | 70  | 35 | 45 | 24 | 30 | 51 | 42 | 6   | 21   | 4  | 8                  |
| K0128.322 | internal thread   | 4    | M22 | 300             | 80  | 42 | 56 | 28 | 35 | 61 | 47 | 6   | 23,5 | 4  | 9                  |
| K0128.324 | internal thread   | 4    | M24 | 300             | 80  | 42 | 56 | 28 | 35 | 61 | 47 | 6   | 23,5 | 4  | 9                  |
| K0128.327 | internal thread   | 4    | M27 | 300             | 80  | 42 | 56 | 28 | 35 | 61 | 47 | 6   | 23,5 | 4  | 9                  |
| K0128.330 | internal thread   | 5    | M30 | 400             | 110 | 60 | 75 | 32 | 38 | 82 | 53 | 7,5 | 26,5 | 5  | 11                 |
| K0128.336 | internal thread   | 5    | M36 | 400             | 110 | 60 | 75 | 32 | 38 | 82 | 53 | 7,5 | 26,5 | 5  | 11                 |
| K0128.342 | internal thread   | 5    | M42 | 400             | 110 | 60 | 75 | 32 | 38 | 82 | 53 | 7,5 | 26,5 | 5  | 11                 |