

Crank handles stainless steel with revolving grip

Item description/product images



Description

Material:

Crank stainless steel 1.4308.

Cylindrical grip thermoplastic and stainless steel 1.4404.

Version:

Crank bright.

Thermoplastic black grey.




Stainless steel bright.

Note:

Similar to DIN 469.

Versions with transverse bore are secured using the ISO 4027 (DIN 914) grub screw.

Drawings

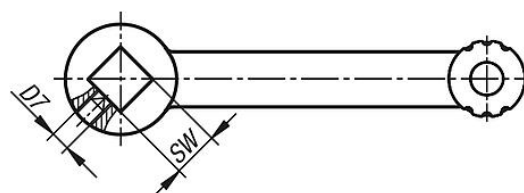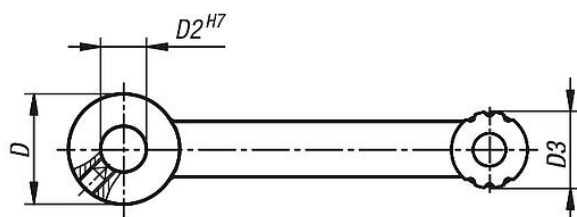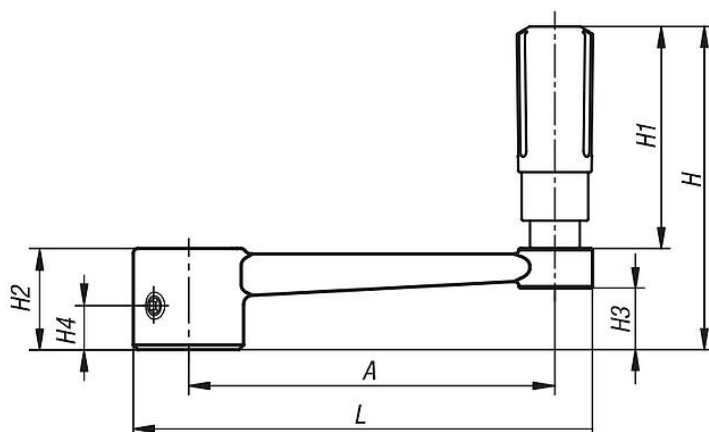

Overview of items

Crank handles stainless steel with cylindrical revolving grip

Order No.	Version 1	Version 2	A	D	D2	D3	D7	H	H1	H2	H3	H4	L	SW
K2075.3110	reamed hole	without transverse hole	80	24	10	16	-	71,1	49,1	22	13,4	-	100	-
K2075.3212	reamed hole	without transverse hole	100	28	12	20	-	87,4	61,4	26	16	-	124	-
K2075.3314	reamed hole	without transverse hole	125	30	14	26	-	110,5	82,5	28	15,8	-	153	-
K2075.3417	reamed hole	without transverse hole	160	34	17	26	-	114,5	82,5	32	19,6	-	190	-
K2075.31106	reamed hole	with transverse bore	80	24	10	16	M6	71,1	49,1	22	13,4	7,5	100	-
K2075.32126	reamed hole	with transverse bore	100	28	12	20	M6	87,4	61,4	26	16	7,5	124	-
K2075.33146	reamed hole	with transverse bore	125	30	14	26	M6	110,5	82,5	28	15,8	7,5	153	-
K2075.34176	reamed hole	with transverse bore	160	34	17	26	M6	114,5	82,5	32	19,6	7,5	190	-
K2075.4110	square socket	without transverse hole	80	24	-	16	-	71,1	49,1	22	13,4	-	100	10

Crank handles stainless steel with revolving grip

Overview of items

Order No.	Version 1	Version 2	A	D	D2	D3	D7	H	H1	H2	H3	H4	L	SW
K2075.4212	square socket	without transverse hole	100	28	-	20	-	87,4	61,4	26	16	-	124	12
K2075.4314	square socket	without transverse hole	125	30	-	26	-	110,5	82,5	28	15,8	-	153	14
K2075.4417	square socket	without transverse hole	160	34	-	26	-	114,5	82,5	32	19,6	-	190	17
K2075.41106	square socket	with transverse bore	80	24	-	16	M6	71,1	49,1	22	13,4	7,5	100	10
K2075.42126	square socket	with transverse bore	100	28	-	20	M6	87,4	61,4	26	16	7,5	124	12
K2075.43146	square socket	with transverse bore	125	30	-	26	M6	110,5	82,5	28	15,8	7,5	153	14
K2075.44176	square socket	with transverse bore	160	34	-	26	M6	114,5	82,5	32	19,6	7,5	190	17