

Hollow screws for steel levelling feet

Item description/product images



Description

Material:
Steel.


Version:
Electro zinc-plated or black phosphated.

Note:
Levelling feet consist of a plate and a threaded spindle.
The matching plate must be selected based on the inside diameter D1.

On request:
Hollow screw with small hex size.

Accessory:
Plate K2347.
Nut K2348.

Drawings

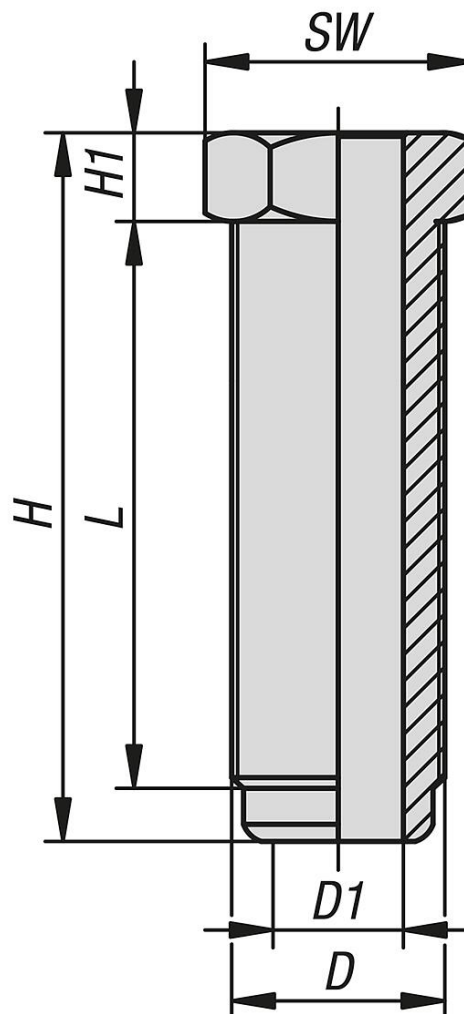

Hollow screws for steel levelling feet

Overview of items

Hollow screws for steel levelling feet

Order No.	Surface finish body	D	D1	H	H1	L	SW	Load rating max. kN (static load only)
K2346.112413X085	galvanised	M24x2	13	105	15	85	24	60
K2346.113622X095	galvanised	M36x2	22	120	15	95	41	90
K2346.113622X170	galvanised	M36x2	22	195	15	170	41	90
K2346.122413X085	phosphated	M24x2	13	105	15	85	24	60
K2346.123622X095	phosphated	M36x2	22	120	15	95	41	90
K2346.123622X170	phosphated	M36x2	22	195	15	170	41	90