

Levelling sets

Item description/product images



Description

Material:

Steel 1.7225.

Version:

Electro zinc-plated and passivated.

Note:

Levelling sets are used wherever heavy systems, machines or equipment need to be placed and levelled. They are characterised by a wide adjustment range of 15 mm to 40 mm.

The static load F applies after deduction of the force applied by the fastening screw.

On request:

Other sizes.


Stainless steel A1 or A4 levelling sets.

Accessory:

K0787 Hook wrench with lug, DIN 1810A enhanced.

Levelling sets

Drawings

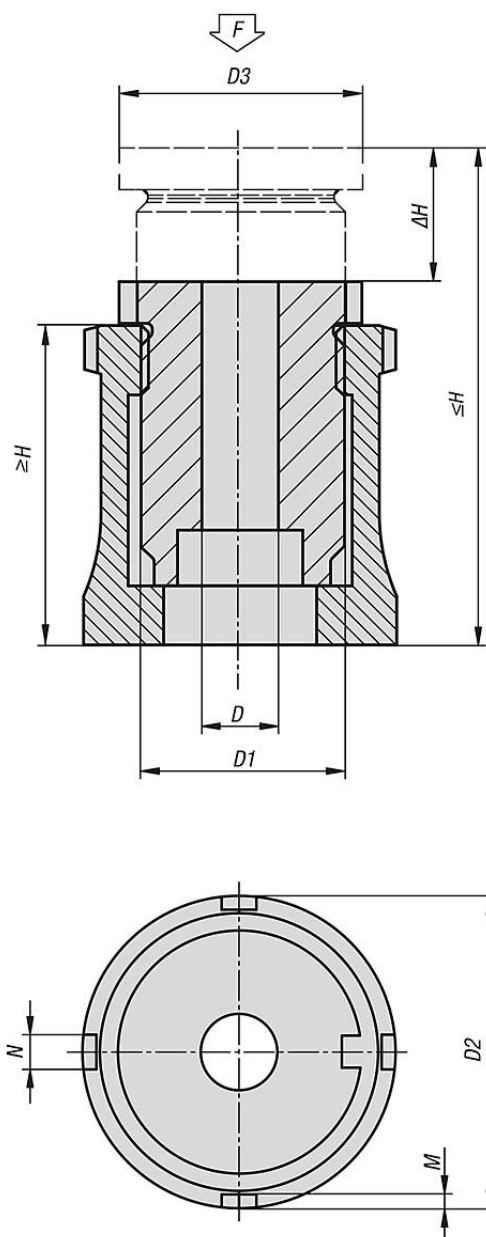

Overview of items

Levelling sets

Order No.	D	D1	D2	D3	H min.	H max.	ΔH	M	N	F kN	for screw	Locknut
K2403.01506	6,6	M15x1	25	19	32	47	15	2	4	45	M6	without locknut
K2403.02008	9	M20x1	32	24	40	60	20	2	4	75	M8	without locknut
K2403.02510	11	M30x1,5	45	35	52	77	25	2	5	140	M10	without locknut
K2403.03212	13,5	M40x1,5	58	45	64	96	32	2,5	6	210	M12	without locknut
K2403.04016	17,5	M50x1,5	70	55	78	118	40	2,5	6	400	M16	without locknut

