
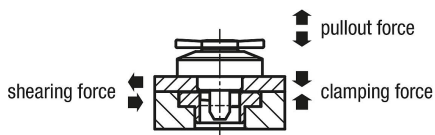


Quarter-turn clamp locks flat

Item description/product images

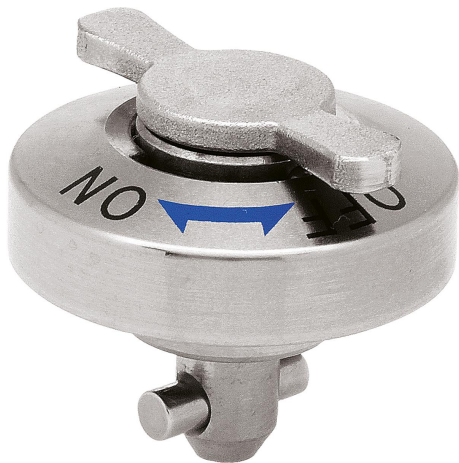

Description

Material:

Housing stainless steel.
Pin stainless steel.
Pin stainless steel.
Knob stainless steel.

Version:

Housing bright.
Pin bright.
Pin bright.
Knob stainless steel, bright.

Note:

M2 or M3 fastening screws are supplied.
Mounting option 1 for plate thickness 6 or 12 mm.
Mounting option 2 for plate thickness 12 to 20 mm.

A gap of more than 0.1 mm appears between the plates if the retaining force is exceeded.


Accessory:

Clamping plates K1062

Drawing reference:

- 1) Mounting option 1
- 2) Mounting option 2
- 3) Plate

Drawings

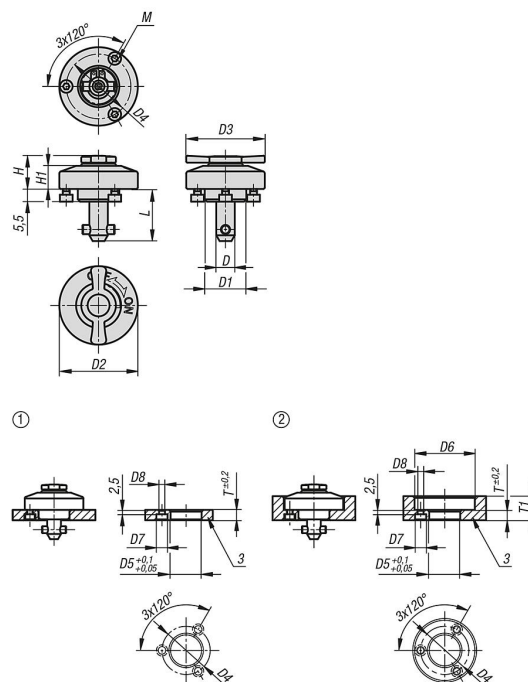

Quarter-turn clamp locks flat

Overview of items

Quarter-turn clamp locks flat

Order No.	D	D1	D2	D3	D4	H	H1	L	M	D5	D6	D7	D8	T	T1	Holding force N	Clamping force N	Shearing force kN	Pullout force F kN	Temperature resistance
K1061.5162	5	14	25	20	21	11,5	6,5	15,5	M2x3	14	26	4,4	2,4	6	6-10	60	60	1,8	1,2	≤200 °C
K1061.8172	8	18	34	32	28	15,4	10	17	M3x4	18	35	6,5	3,4	6	6-14	90	90	3,2	2,6	≤200 °C
K1061.8232	8	18	34	32	28	15,4	10	23	M3x4	18	35	6,5	3,4	12	12-20	90	90	3,2	2,6	≤200 °C
K1061.15162	15,5	14	25	20	21	11,5	6,5	60	M2x3	14	26	4,4	2,4	6	6-10	1,2	5	60	1,8	≤180 °C
K1061.18172	17	18	34	32	28	15,4	10	90	M3x4	18	35	6,5	3,4	6	6-14	2,6	8	90	3,2	≤180 °C
K1061.18232	23	18	34	32	28	15,4	10	90	M3x4	18	35	6,5	3,4	12	12-20	2,6	8	90	3,2	≤180 °C

Order No.	Item	Version 1	Version 2	Form definition
K1061.5162	Rotary Latch	with rotary knob, flat	pins steel	-
K1061.8172	Rotary Latch	with rotary knob, flat	pins steel	-
K1061.8232	Rotary Latch	with rotary knob, flat	pins steel	-
K1061.15162	Rotary Latch	with rotary knob, flat	pin stainless steel	-
K1061.18172	Rotary Latch	with rotary knob, flat	pin stainless steel	-
K1061.18232	Rotary Latch	with rotary knob, flat	pin stainless steel	-